



# Installation Instruction, Mechanical

Applicable for W380, Z555

## Contents

<b>1</b>	<b>General</b> .....	<b>2</b>
<b>2</b>	<b>Hardware</b> .....	<b>2</b>
2.1	Test Setup .....	2
2.2	Computer.....	3
2.3	Service Card Reader/Service Card .....	3
2.4	Sony Ericsson programming interface cable – DCU-60 .....	3
2.5	Bluetooth Device .....	3
2.6	Phone Power .....	3
2.6.1	Battery .....	3
2.6.2	Power Supply .....	4
2.6.3	Dummy Battery.....	4
2.7	Label Printer .....	4
<b>3</b>	<b>Software</b> .....	<b>4</b>
3.1	EMMA III.....	4
3.2	Labelmake II software .....	5
<b>4</b>	<b>Revision History</b> .....	<b>5</b>


# 1 General

This document describes the installation procedure for the Mechanical repair package. The Mechanical repair package consists of a Computer and Interface Cables. A label printer can be installed to be able to print new labels.

## 2 Hardware

All hardware must be approved by Sony Ericsson and is documented in the Equipment List.

### 2.1 Test Setup

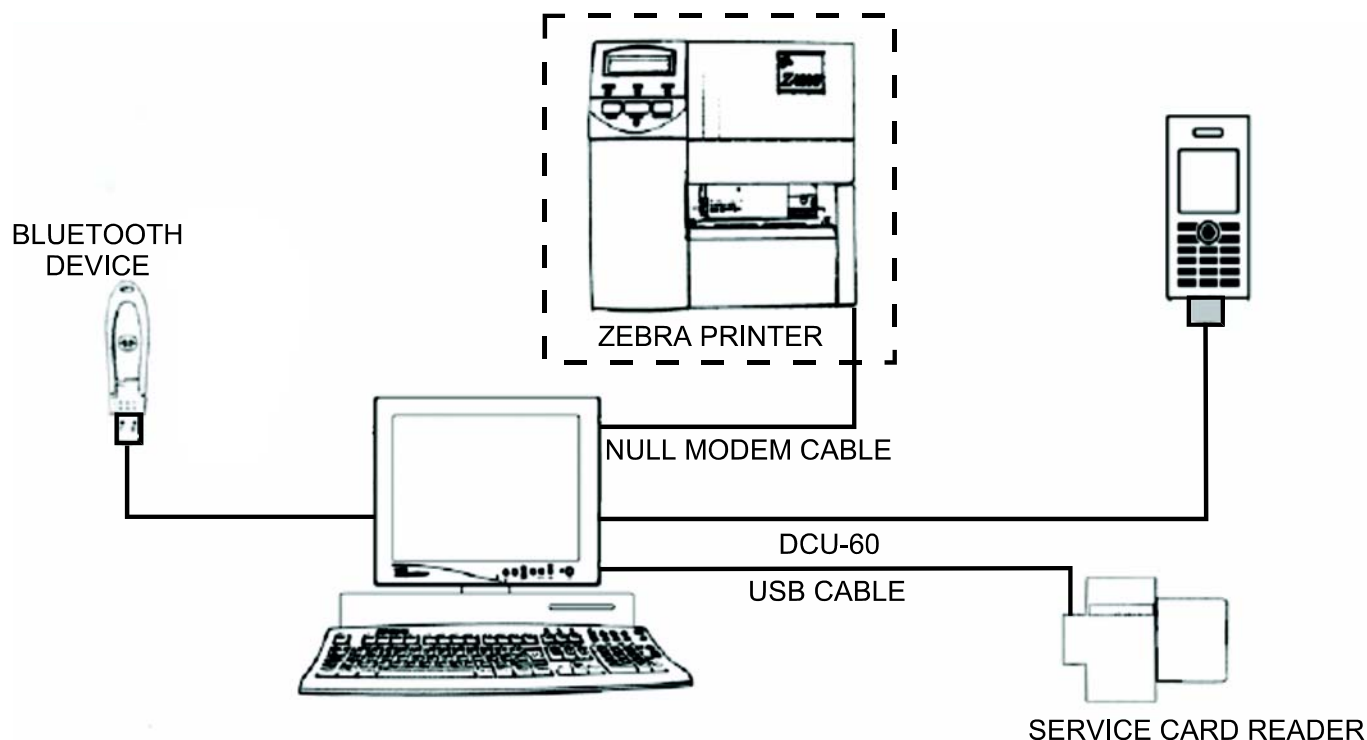

The equipment in this picture is specified in the Equipment List.

## **2.2 Computer**

IBM compatible computer is required. The computer should have two USB-ports. Refer to Equipment List for minimum requirements.

## **2.3 Service Card Reader/Service Card**

The Service card reader/Service card is required to print labels. The Service Card Reader is delivered with the necessary software and instructions for installation. The Service Card Reader connects to an USB-port on the computer.

## **2.4 Sony Ericsson programming interface cable – DCU-60**

The cable is the interface between the computer and the phone. The DCU-60 cable should be connected to a USB-port on the computer.

## **2.5 Bluetooth Device**

Any Bluetooth device such as a headset, other Bluetooth phone or other Bluetooth device can be used to verify the Bluetooth function in the phone. Set up the connection according to the chosen equipment's manufacturer instructions.

## **2.6 Phone Power**

There are two options for powering the phone, a fully charged Battery or a Power supply with a Dummy Battery, both are acceptable.

### **2.6.1 Battery**

A fully charged Sony Ericsson battery approved for this phone model must be used. The part number can be found in the Mechanical Equipment List.



## **2.6.2 Power Supply**

A Power Supply according to the Mechanical Equipment List may be used.

Set the output of the Power Supply as follows

- Voltage: 3.8Vdc
- Current: 2.0Amps

## **2.6.3 Dummy Battery**

A dummy battery is to be used together with a power supply to power the phone.

Connect the cables from the battery eliminator to the power supply, red cable to positive output terminal and black cable to negative output terminal. There is a 3-position switch on the Dummy Battery that should be set to position "B".

## **2.7 Label Printer**

A Zebra printer shall be used. Connect the printer with a Null Modem cable [refer to the Zebra printer manual] to the serial port on the computer. Read the Zebra installation manual for more information about the installation.

# **3 Software**

## **3.1 EMMA III**

EMMA III contains software upgrades and tools required for servicing this phone. Emma III is accessible through the CSPN web page. Installation and user manuals are available at the EMMA III start page.

<http://ma3.extranet.sonyericsson.com/ma3/>

## 3.2 Labelmake II software

LabelMake II is an application installed through Java Web Start.

Access the Labelmake II software from the CSPN Web page.

<http://cspn.extranet.sonyericsson.com>

This application can be found from the dropdown menu

### **LabelMake II**

Press "START LabelMake II "button and you will be directed to the LABELMAKE II client page.

Product labels are downloaded on-line from a remote server database.

## 4 Revision History

Rev.	Date	Changes / Comments
1	2008-02-29	Initial Release