

Author

Jiří Balcar

How to disassemble Siemens SX1?

adjustment

Issued on: 2/07/2005

Average rating: 3.2 (rated 30x)

A practical guide to disassembling the SX1 phone.

Using the procedures or programs listed below is not in accordance with the warranty conditions of the phone manufacturer. By using them, you run the risk of not recognizing the warranty on the device in the event of damage to it.



This instruction can, without perfect understanding of the procedure, lead to damage to your phone (even permanent). Before starting work, read it all thoroughly and if you have any ambiguities, consult them in advance on the designated [discussion forum](#) !



If we need to disassemble our darling for various reasons, we bring you instructions on how to do it. If you are determined, there is nothing to fear.

[Our reader Zdeněk Korf - Zdeno](#) is the author of the photos and a practitioner in disassembling the phone . Thanks.

What you will need:

1. TORX T05 screwdriver (you can buy this in a hardware store for CZK 25)



2. Skillful hands and patience.

Disassembling the phone

And here we go. We remove the battery cover, take out the battery and the SIM card.



First, we unscrew 4 screws (carefully, the thread is in plastic).




The following is the separation of the three parts of the phone from each other.


The front part is still secured by beaks, which are under buttons 2, 5 and 7, 0. A SIM card or a flat screwdriver will help us, for example. (!!!! careful !!!!).

At this stage, we can perhaps clean the display.


An important step during disassembly is to separate the keyboard from the motherboard (the display is also connected to the keyboard).

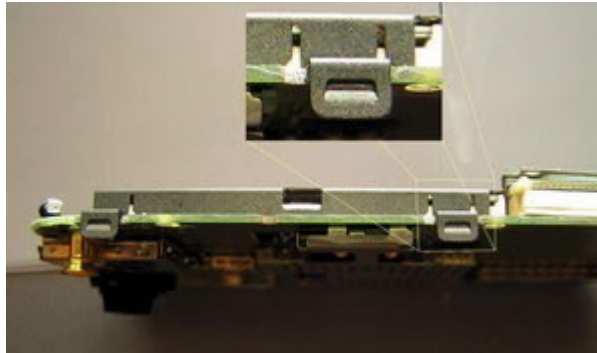

First, we'll press out the pads. It's easy.

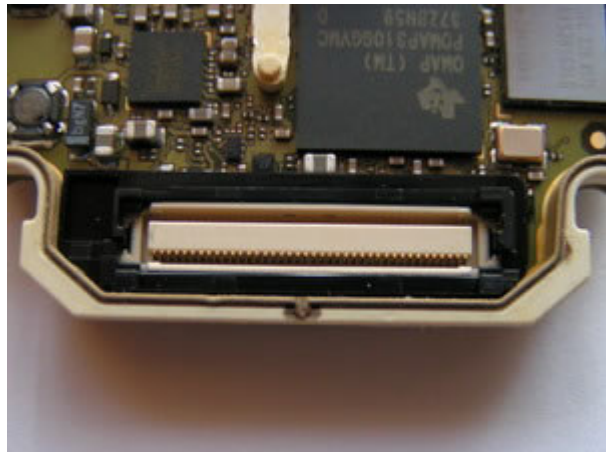

Now you need to carefully pull out the connector that is under the keyboard.

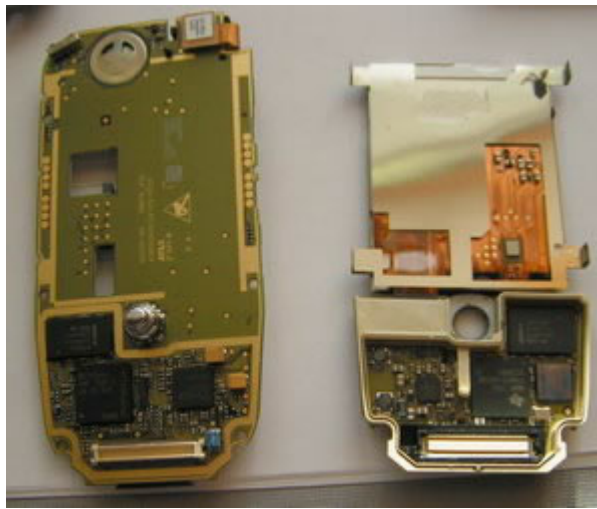

And we also have the keyboard board disassembled.

No one may copy graphics, texts or anything else from these pages without the permission of the authors. All information published on this site is intended for educational purposes only and may not be used for commercial use or in violation of laws. The authors are not responsible for inappropriate use of data from these pages.

©2003-2004 Radim Zeman | ©2004 Roman Gregor